



A member of the THIELE-Group

The Name for Safety.

Grade 100 Oblong Master Links & -Assemblies with new ratings!



TWN 1803 New


Part-No.	WLL SF=4:1 [lbs.]	WLL SF=5:1 [lbs.]	Dimensions			Weight app. [lbs.]	Trade Size	
			D [inch]	T [inch]	B [inch]		1-Leg [inch]	2-Leg* [inch]
F1803013	7,300	5,800	0.51	3.54	1.97	0.64	7/32 9/32	7/32
F1803016	11,300	9,000	0.63	4.33	2.36	1.18	5/16	9/32
F1803018	13,800	11,000	0.71	5.12	2.76	1.75	3/8	5/16
F1803020	16,600	13,200	0.79	5.51	3.15	2.36	-	-
F1803022	19,600	15,700	0.87	6.30	3.54	3.24	1/2	3/8
F1803026	29,100	23,300	1.02	7.09	3.94	5.11	5/8	1/2
F1803032	43,400	34,700	1.26	9.06	4.92	9.79	3/4	-
F1803036	55,200	44,100	1.42	9.84	5.51	13.60	7/8	5/8
F1803040	66,200	53,000	1.57	11.42	6.30	19.30	-	-
F1803045	86,200	69,000	1.77	12.60	6.89	27.00	1	3/4 7/8
F1803050	109,000	87,100	1.97	13.39	7.48	35.00	1-1/4	-
F1803056	138,000	111,000	2.20	14.96	8.27	50.00	-	1
F1803063	172,000	138,000	2.48	16.93	9.45	72.00	-	-
F1803070	218,000	175,000	2.76	18.50	10.24	97.00	-	1-1/4



Acc. to ASTM A906 / A906 M-02 and ASTM A952 / A952 M-02. Blue powder coated [RAL 5002].
*Sling angle α max 60°.

TWN 1804 New

Part-No.	WLL SF=4:1 [lbs.]	Dimensions							Weight app. [lbs.]	Trade Size 3-4-Leg* [inch]
		E [inch]	D [inch]	T [inch]	B [inch]	D ₁ [inch]	T ₁ [inch]	B ₁ [inch]		
F1804016	9,700	6.69	0.63	4.33	2.36	0.51	2.36	1.18	2.08	7/32
F1804018	11,900	7.48	0.71	5.12	2.76	0.51	2.36	1.18	2.65	9/32
F1804020	14,900	8.27	0.79	5.51	3.15	0.63	2.76	1.38	3.96	5/16
F1804026	25,100	10.63	1.02	7.09	3.94	0.79	3.54	1.77	8.31	3/8
F1804032	38,900	13.78	1.26	9.06	4.92	1.02	4.72	2.36	17.00	1/2
F1804040	58,800	16.54	1.57	11.42	6.30	1.10	5.12	2.56	28.30	5/8
F1804050	94,100	19.69	1.97	13.39	7.48	1.42	6.30	3.15	54.30	3/4
F1804056	120,000	22.05	2.20	14.96	8.27	1.57	7.09	3.54	75.70	7/8
F1804063	155,000	24.80	2.48	16.93	9.45	1.77	7.87	3.94	108.00	1
F1804080	244,000	29.13	3.15	20.47	11.42	1.97	8.66	4.33	190.00	1-1/4

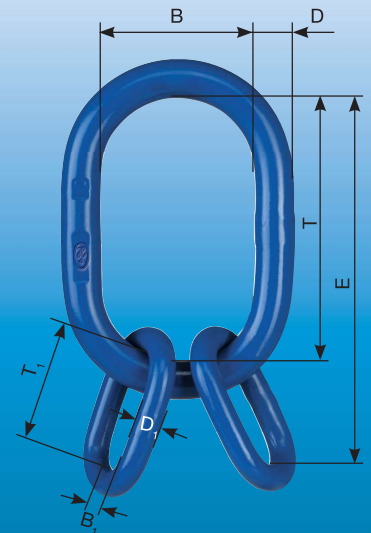

Acc. to ASTM A906 / A906 M-02 and ASTM A952 / A952 M-02. Blue powder coated [RAL 5002].
*Sling angle α max 60°.

KWS Inc. · P.O. Box 470487 · Tulsa OK 74147
Toll Free 800-872-9313
www.kwschain.com · sales@kwschain.com

(918) 665-4114
(918) 665-4118