



A member of the THIELE-Group


The Name for Safety.



# Grade 80 Oblong Master Links & -Assemblies with new ratings!

## TWN 1303 New


Part-No.	WLL SF=4:1 [lbs.]	WLL SF=5:1 [lbs.]	Dimensions			Weight app. [lbs.]	Trade Size	
			D [inch]	T [inch]	B [inch]		1-Leg [inch]	2-Leg* [inch]
F1303013	5,800	4,700	0.51	3.54	1.97	0.64	7/32 9/32 5/16	7/32
F1303016	9,000	7,200	0.63	4.33	2.36	1.18	-	9/32
F1303018	11,000	8,800	0.71	5.12	2.76	1.75	3/8	5/16
F1303020	13,200	10,600	0.79	5.51	3.15	2.36	1/2	-
F1303022	15,700	12,500	0.87	6.30	3.54	3.24	-	3/8
F1303026	23,300	18,600	1.02	7.09	3.94	5.11	5/8	1/2
F1303032	34,700	27,800	1.26	9.06	4.95	9.79	3/4 7/8	5/8
F1303036	44,100	35,300	1.42	9.84	5.51	13.60	-	-
F1303040	53,000	42,400	1.57	11.42	6.30	19.30	1	-
F1303045	69,000	55,200	1.77	12.60	6.89	27.00	-	3/4 7/8
F1303050	87,100	69,700	1.97	13.39	7.48	35.80	1-1/4	-
F1303056	111,000	88,600	2.20	14.96	8.27	50.10	1-27/64	1
F1303063	138,000	110,000	2.48	16.93	9.45	71.90	1-37/64	-
F1303070	175,000	140,000	2.76	18.50	10.24	97.00	-	1-1/4 1-27/64
F1303080	234,000	187,000	3.15	20.47	11.42	141.00	-	1-37/64
F1303085	280,000	224,000	3.35	20.47	11.42	161.00	-	-
F1303095	315,000	252,000	3.74	22.83	12.60	224.00	-	-
F13030110	412,000	329,000	4.33	26.77	14.96	352.00	-	-

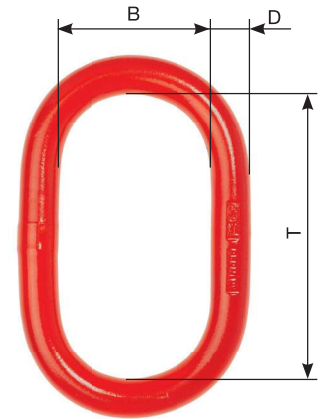

Acc. to ASTM A906 / A906 M-02 and ASTM A952 / A952 M-02. Red powder coated (RAL 3003).  
\*Sling angle  $\alpha$  max 60°.

## TWN 1304 New

Part-No.	WLL SF=4:1 [lbs.]	Dimensions							Weight app. [lbs.]	Trade Size
		E [inch]	D [inch]	T [inch]	B [inch]	D <sub>1</sub> [inch]	T <sub>1</sub> [inch]	B <sub>1</sub> [inch]		3-1/4-Leg* [inch]
F1304016	7,300	6.14	0.63	4.33	2.36	0.39	1.81	0.91	1.58	7/32
F1304018	9,500	7.48	0.71	5.12	2.76	0.51	2.36	1.18	2.65	9/32
F1304020	11,800	7.87	0.79	5.51	3.15	0.51	2.36	1.18	3.26	5/16
F1304026	20,100	10.44	1.02	7.09	3.94	0.71	3.35	1.57	7.51	3/8
F1304032	31,200	13.00	1.26	9.06	4.92	0.87	3.94	1.97	14.10	1/2
F1304040	47,000	16.14	1.57	11.42	6.30	1.02	4.72	2.36	26.50	5/8
F1304050	75,400	19.69	1.97	13.39	7.48	1.42	6.30	3.15	54.30	3/4
F1304056	95,700	21.26	2.20	14.96	8.27	1.42	6.30	3.15	68.60	7/8
F1304063	124,000	24.02	2.48	16.93	9.45	1.57	7.09	3.54	97.40	1
F1304080	196,000	29.13	3.15	20.47	11.42	1.97	8.66	4.33	190.00	1-1/4
F1304085	238,000	30.71	3.35	20.47	11.42	2.20	10.24	5.12	233.00	1-27/64
F1304110	306,000	37.79	4.33	26.77	14.96	2.48	11.02	5.51	451.00	1-37/64

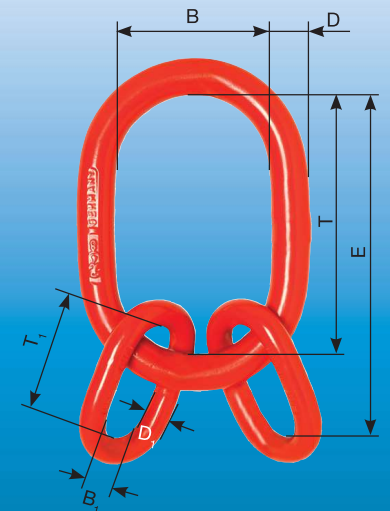

Acc. to ASTM A906 / A906 M-02 and ASTM A952 / A952 M-02. Red powder coated (RAL 3003).  
\*Sling angle  $\alpha$  max 60°.

KWS Inc. · P.O. Box 470487 · Tulsa OK 74147  
Toll Free 800-872-9313  
www.kwschain.com · sales@kwschain.com

(918) 665-4114  
(918) 665-4118